




CRS® CRS® Deco MRS® Motorised

THE WORLD **BEHIND** YOUR CURTAINS

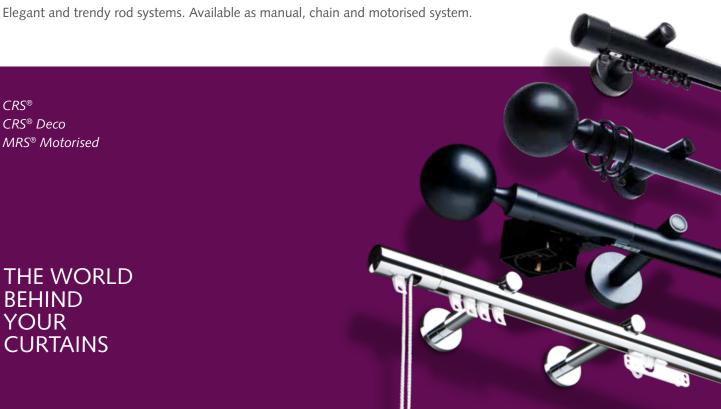

FOREST CURTAIN ROD SYSTEM - CRS®




PRODUCT INFORMATION


- Elegant and trendy hand drawn channel rod system
- Curtain rod fitted with curtain carriers
- Available in two dimensions: 20 mm (0,8") and 28 mm (1.1")
- Bendable, both with an inside and outside corner
- Available in 9 colours: White-PC, Anthracite-PC, Chrome, Inox-PC, Inox-AN, Gold, Bronze, Taupe-PC, Antique-PC
- The brackets and endcaps are available in matching colours
- Inox coloured components can be used for both the Inox and Bronze coloured channel rod
- Wide range of decorative finials offering great variety of design options
- Possibility to use without a finial for inside frame fix
- Length: 5,80 m (19")
- Rod quality: high-grade aluminium, chromated, powder coated or anodized
- Easy and quick assembly
- Forest Easyfold System (FES) for wave pleat also applicable on CRS

PROFILE

- Shown actual size 1:1
- Aluminium Extrusion
- Weight 20 mm (0,8"): 320 gram per meter
- Weight 28 mm (1,1"): 460 gram per meter
- Dimensions: 20 mm (0,8") and 28 mm (1,1")
- 1 CRS channel rod 20 mm (0,8")
- 2 CRS channel rod 28 mm (1,1")
- 3 CRS end cap
- 4 CRS carrier
- 5 KS shirrtape carrier
- 6 CRS wall bracket double





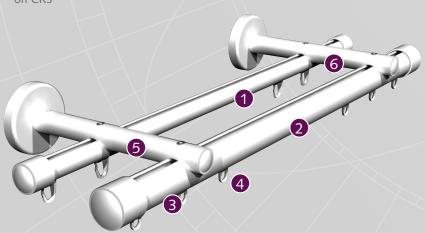

COLOUR OPTIONS CRS







Taupe- PC Black-PC








Anthracite Gold Antique Bronze



APPLICATIONS



BENDING / CURVING

The 20 mm (0,8") rod can be curved and reverse curved using a radius of 10 cm (4"); the 28 mm (1,1") rod can be curved and reverse curved by using a radius of 20 cm (8").



FOR USE IN

Domestic and / or project market, or at any location where a high quality, elegant and manually operated channel rod system is requested.


MOUNTING BRACKETS

CRS Ceiling Bracket




CRS Ceiling Suspension Bracket

4 cm (1,6"), 5 cm (2") or 10 cm (4") 20 mm (0,8")/ 28 mm (1,1").




CRS Wall Bracket, single

8 cm (3,1") Ø 20 (0,8") or 28 mm (1,1"). 12 cm (4,7") Ø 20 (0,8") or 28 mm (1,1"). 16 cm (6,3") Ø 20 (0,8") or 28 mm (1,1").




CRS Wall Bracket, double

16 cm (6,3") Ø 20 mm (0,8") 16 cm (6,3") Ø 28 mm (1,1")




CRS Wall Bracket, double

16 cm (6,3") Ø 20/28 mm (0,8/1,1")




CRS Wall Bracket, double

20 cm (7,87") Ø 28 mm (1,1")




FOREST MOTORISED ROD SYSTEM - MRS®

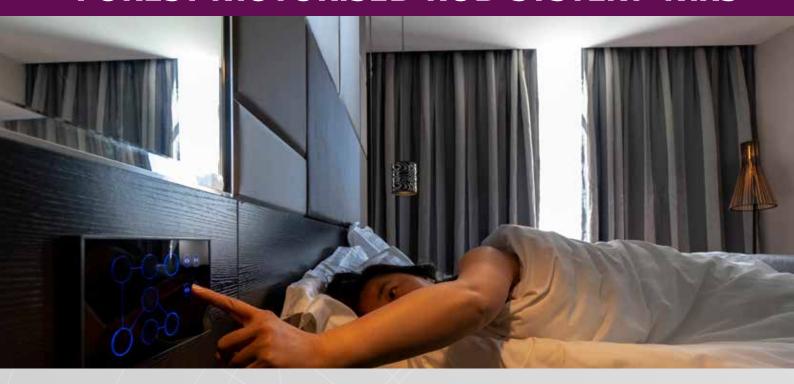

PRODUCT INFORMATION

- Comfortable and luxurious motorised channel rod system
- Curtain rod fitted with curtain carriers
- Two types of motors available:
 - 24 Volt Forest Shuttle with touch impulse
 - 230 Volt FMS with 30, 45 or 60 Watt
- Available dimension: 28 mm (1,1")
- Available in 8 colours: White-PC, Anthracite-PC, Chrome, Inox-PC, Inox-AN, Gold, Taupe-PC, Antique-PC
- The brackets and endcaps are available in matching colours
- Inox coloured components can be used for both the Inox and Bronze coloured channel rod
- Wide range of decorative finials offering great variety of design options
- Length: 5,80 m (19")
- Rod quality: high-grade aluminium, chromated, powder coated or anodized
- Easy-running return pulley
- Smooth and silent operation through Kevlar reinforcement of the transport belt
- Long life-span
- Easy opening and closing with the hand-held Diamond Sense remote control
- Domotica Ready
- Overlap carriers guarantees a complete closing of the curtains
- Forest Wave System for wave pleat also applicable on MRS
















- 1 MRS channel rod
- 2 MRS end cap
- 3 MRS motor pulley equipped with high-quality ball bearings
- 4 MRS carrier round
- 5 Single master carrier
- 6 Kevlar transport belt
- 7 Easy running return pulley



PROFILE

- Shown actual size 1:1
- Weight 480 gr/mtr
- Aluminium Extrusion
- Dimension: 28 mm (1,1")



APPLICATIONS



FOR USE IN

Domestic and / or contract market, or at any location where a high quality, elegant and motorised operated channel rod system is required.


MOUNTING BRACKETS

MRS Ceiling Bracket




CRS/MRS Ceiling Suspension Bracket $4 \text{ cm } (1,6"), 5^* \text{ cm } (2") \text{ or } 10 \text{ cm } (4")$

4 cm (1,6"), 5 cm (2") or 10 cm (4") 20 mm (0,8")/ 28 mm (1,1").




CRS/MRS Wall Bracket, single 12 cm (4,7") Ø 28 mm (1,1"). 16 cm (6,3") Ø 28 mm (1,1").




CRS/MRS Wall Bracket, double with 4 cm wall bracket extension

16 cm (6,3") Ø 28 mm (1,1")

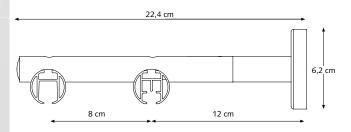

CRS/MRS Wall Bracket, double 20 cm (7,87") Ø 28 mm (1,1")

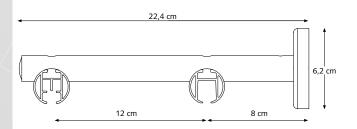

FOREST MOTORISED ROD SYSTEM - MRS®

COMPATIBLE WITH



www.amx.com
In Concert Partner



www.knx.nl KNX partner



www.z-wave.com
Z Wave alliance partner



www.crestron.com I2P partner




SMARTHOMES

www.smart-homes.nl
Smart homes partner

Motorised Rod System (MRS®) is compatible with many other Building Automation systems, thanks to its modular construction. A competitive advantage over the motorised drapery systems in the world!

COLOUR OPTIONS MRS



CONTROL OPTIONS

Our broad range of controls make finding a fit for your home even easier; controlling the curtains by hand, remote or even by building automation system. With the remote you can control the curtains in any position you like. Controlling the motorised rod system by your smartphone or tablet, you can create and schedule customized room scenes that allow your curtains to operate on their own throughout the day.



FOREST WIRELESS CONNECTOR

The Forest Wireless Connector is an easy way to make the motorised rod systems 'smart'. This wireless remote solution works in combination with an analogue timer or a smart plug with which services as Apple HomeKit or Google Assistant become available. With the Forest Smart Plug it is possible to control by the Forest Connect app. The Wireless Connector is also easily incorporated into most popular building managent systems, including dry contact controls.



FOREST DIAMOND SENSE REMOTE

15 Channel Remote control, possibility to control up to 15 systems individually and in group by integrated timer function or manual. Auto-On mode, when holding hand above it, the integrated LED light will automatically come on. Radio control, range up to 30 meters. Including magnetic wall support.



BUILDING AUTOMATION

The MRS® system can be connected to any Building Automation system, by relay control.



HOTEL CONTROL

The MRS® system can be connected to any Hotel Automation system, by relay control.