



EASY
INSTALL



CORDED
CONTROL


FOREST CORDED Systems

Heavy duty corded curtain track systems with separate internal cord channels; preventing cord sag and eliminating cord tangle.

CKS® corded | Coded Klick System

CCS® corded | Coded Contract System

THE WORLD
BEHIND
YOUR
CURTAINS

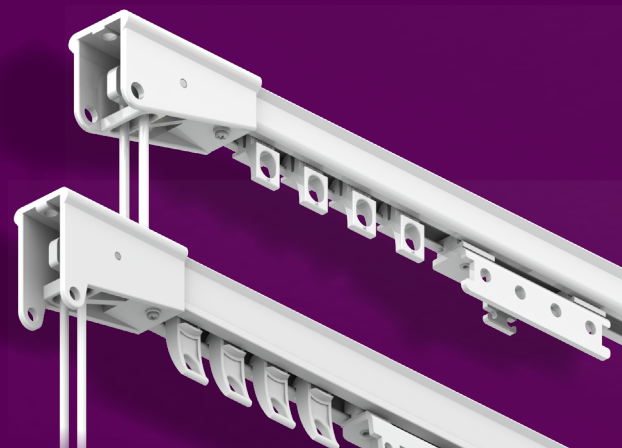

FOREST CKS® corded



PRODUCT INFORMATION

- Highly efficient cord traversing system with separate internal cord channels; preventing cord sag and eliminating cord tangle.
- Quick installation with "Smart Klick" brackets for wall and ceiling applications.
- Bendable; it can be curved and reverse curved by using a 10 cm (4") radius or continuous curved.
- Heavy duty clickable carriers - UV protected - for smooth and easy traversing. Offset shape for straight hanging pleats.
- Can also be used for ripplefold or accordiafold drapery systems.
- Maximum fabric weight: ± 6 kg per meter (4,5 LBS per ft.).
- Colours available: white, silver and black.
- Available lengths: 4 meter (13'1"), 5 meter (16'4"), 6 meter (19'8"),).
- Track finish: chromated powder coated with a factory applied patented dry lubricant.
- Warranty: 10 years





Clickable carrier



Easy installation
click - position - tighten

PROFILE

- Shown actual size 1:1
- Aluminium Extrusion
- Weight: 202 grams per meter (2.17 ounce per ft.)
- Dimensions: 14 mm x 20 mm (0,6" x 0,8").

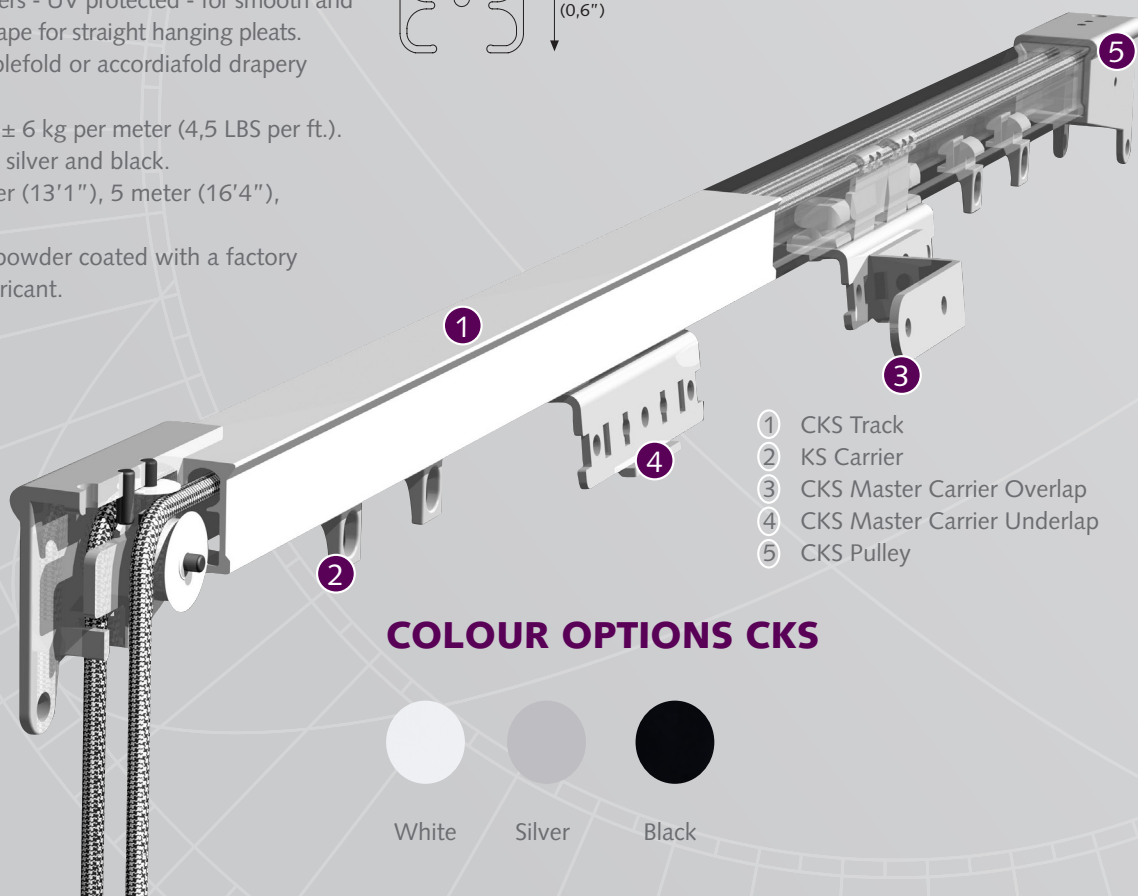

- ① CKS Track
- ② KS Carrier
- ③ CKS Master Carrier Overlap
- ④ CKS Master Carrier Underlap
- ⑤ CKS Pulley

COLOUR OPTIONS CKS



White




Silver



Black




APPLICATIONS

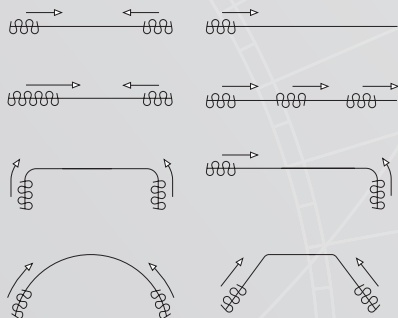

BENDING / CURVING

The track can be curved and reversed curved using a 10 cm (4") radius. Continuous curving can easily be done using the continuous curver or the electric powered bender.




FOR USE IN

Hotels - offices - residences - boats - campers - planes or any location where an efficient cord traversing system is required.

MOUNTING BRACKETS

Wall bracket

3,5 cm (1,4"),
6 cm (2,4")




A) Min. 10 cm (4")



A) Min. 15 cm (6")



SK Ceiling Bracket




SK Wall bracket aluminium single

A) 7,5 cm (3")

B) 6,3 cm (2,5")

A) 10 cm (4")

B) 8,8 cm (3,5")

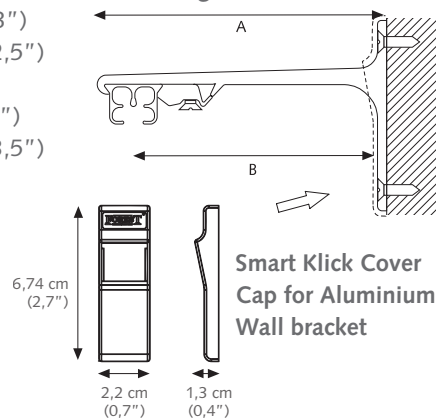

SK Wall bracket aluminium double

A) 15 cm (6")


B) 9,2 cm (3,6")

C) 4,5 cm (1,8")

A) 20 cm (8")


B) 9,2 cm (3,6")

C) 9,5 cm (3,7")

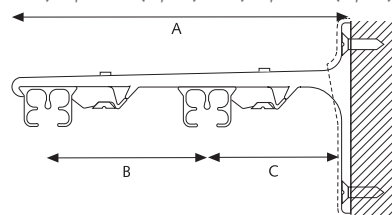

SK Wall bracket aluminium triple

25 cm (10")

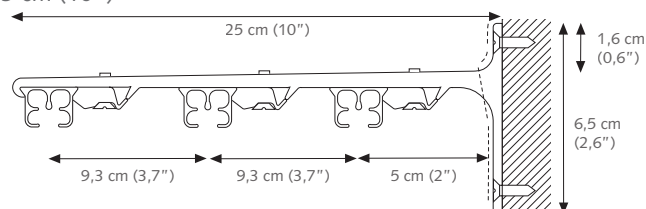

FOREST CCS® corded



PRODUCT INFORMATION

- Heavy duty cord operated system, with separate internal cord channels; preventing cord sag and eliminating cord tangle.
- Quick installation with "Smart Klick". brackets for wall and ceiling applications.
- Bendable; it can be curved and reversed curved with a 20 cm (8") radius or continuous curve.
- Heavy duty clickable carriers - 10 carriers on a breakaway strip - UV protected.
- Can also be used for Forest Easyfold and accordiafold drapery systems.
- Maximum fabric weight: 8 kg. per mtr (5,3 LBS per ft).
- Colours available: white, silver and brown.
- Track finish: chromated powder coating with a factory applied patented dry lubricant.
- Lengths available: 3.66 m (12'), 4.27 m (14'), 4.88 m (16'), 6.10 m (20').
- Same brackets as used with Klick System.
- Warranty: 10 years.




Easy installation
click - position - tighten




Clickable carrier

PROFILE

- Shown actual size 1:1
- Aluminium Extrusion
- Weight: 300 gram per mtr (3.22 ounce per ft)
- Dimensions: 20 mm x 20 mm (3/4" x 3/4")



- 1 Carrier
- 2 CCS/FMS Master Carrier Underlap
- 3 Traverse cord
- 4 CCS/FMS Master Carrier Overlap
- 5 CCS Cord connector
- 6 CCS Track
- 7 Pulley

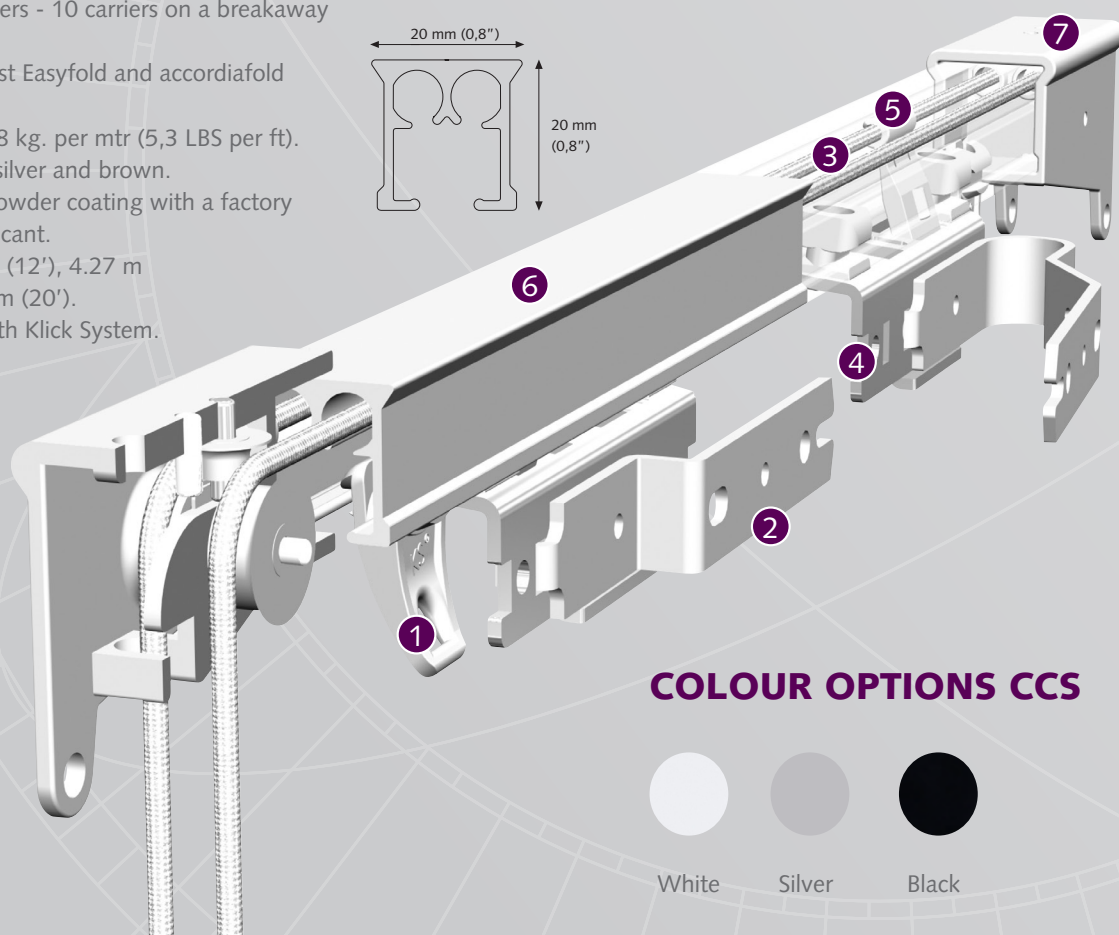

COLOUR OPTIONS CCS



White




Silver



Black




APPLICATIONS

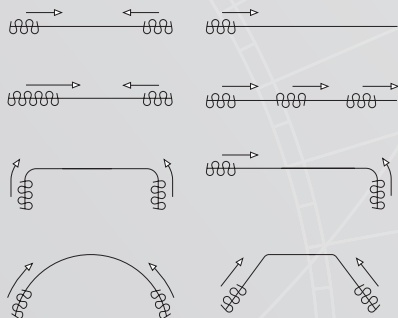

BENDING / CURVING

The track can be curved and reversed curved using a 20 cm (8") radius. Continuous curving can be done with the electric powered bender or by special order from factory.




FOR USE IN

Hotels - motels - offices - healthcare - schools - residential or any location where a heavy duty cord traverse system is required.

MOUNTING BRACKETS

SK Ceiling Bracket




A) Min. 20 cm (8")



SK Aluminium Wall Bracket single

A) 7,5 cm (3") B) 6,3 cm (2,5")


A) 10 cm (4") B) 8,8 cm (3,5")

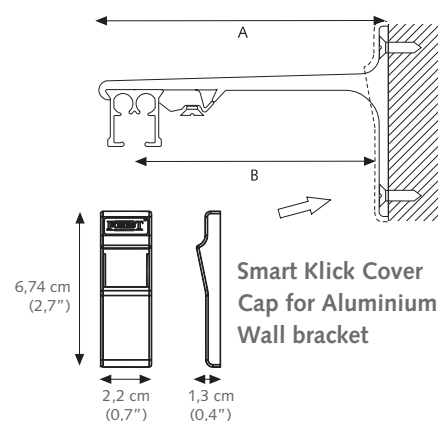

SK Wall bracket aluminium double


A) 15 cm (6") B) 9,2 cm (3,6") C) 4,5 cm (1,8")

A) 20 cm (8") B) 9,2 cm (3,6") C) 9,5 cm (3,7")

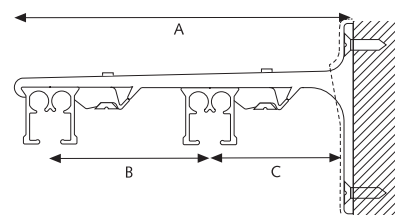

SK Wall bracket aluminium triple

25 cm (10")

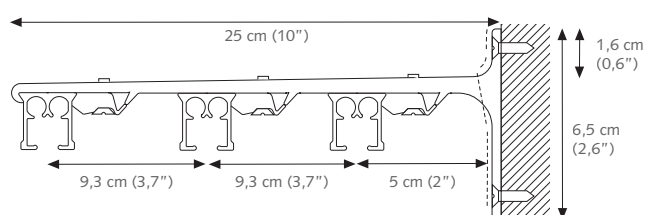

Brackets need to be placed every 50 - 60 cm (20"), depending on fabric weight.