



MANUAL
OPERATION



RECESS
POSSIBLE




EASY
TO BEND

FOREST KS[®] *Klick System*

Highly efficient hand drawn system for all types of medium and light weight draperies.
Quick installation with "Smart Klick" brackets for wall and ceiling applications.

THE WORLD
BEHIND
YOUR
CURTAINS

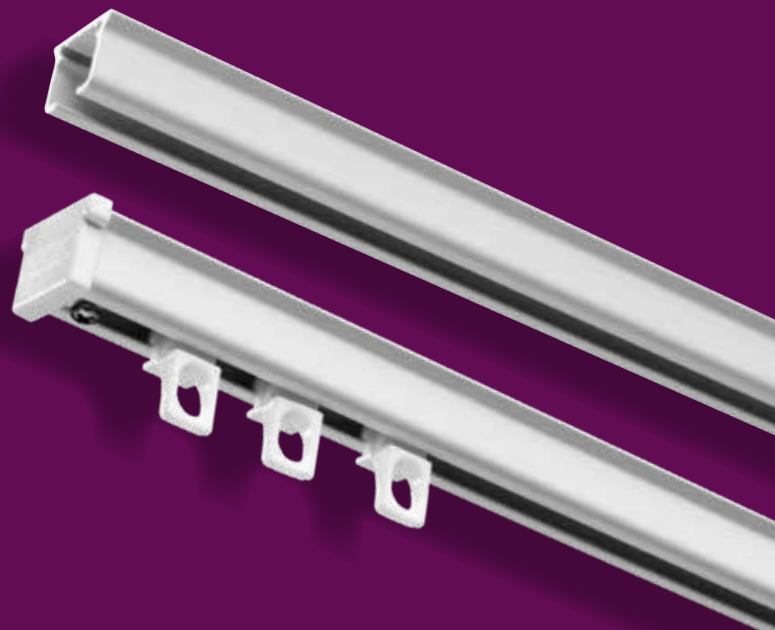





PRODUCT INFORMATION

- Highly efficient hand drawn system for all types of medium weight draperies.
- Quick installation with "Smart Klick" brackets for wall and ceiling applications with cover caps that conceal the screws.
- Bendable; it can be curved and reversed curved using a 10 cm (4") radius or continuous curve.
- Suitable for special window decoration as circular, arch and triangle window models.
- Heavy duty clickable carriers, UV-protected, for smooth and easy traversing.
Offset shape for straight hanging pleats.
- Can also be used for Forest Easyfold System and accordiafold drapery systems.
- Maximum fabric weight: 8 kg per meter (6 LBS per ft.).
- Colours available: white, gold, silver, brown, black, cream, beige, red, blue, yellow and green.
- Special colours: available on request.
- Available lengths: 3 meter (9'10"), 4 meter (13'1"), 5 meter (16'4"), 6 meter (19'8"), 7 meter (23').
- Track finish: chromated powder coated with a factory applied patented dry lubricant.

PROFILE

- Shown actual size 1:1.
- Aluminium Extrusion.
- Weight: 150 grams per meter (1.62 ounce per ft.).
- Dimensions: 14 mm x 20 mm (0,6" x 0,8").
- KS Recess: 12,5 mm x 21 mm (0,5" x 0,8")

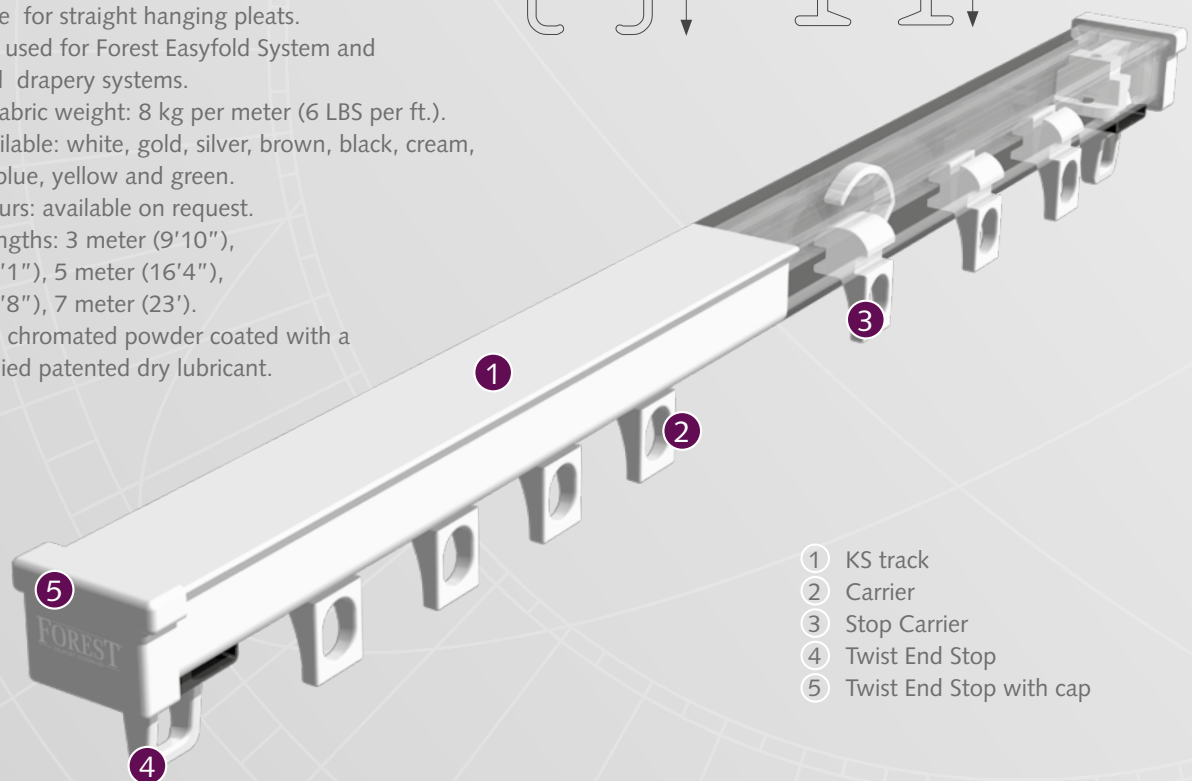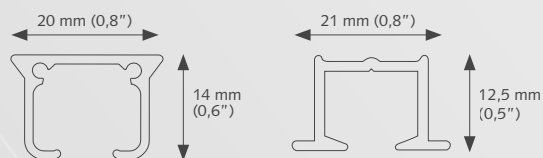


- ① KS track
- ② Carrier
- ③ Stop Carrier
- ④ Twist End Stop
- ⑤ Twist End Stop with cap




FOR USE IN

Hotels - offices - schools - healthcare - residences - boats - campers - planes or at any location where an efficient hand drawn system is required.



Easy installation
click - position - tighten



clickable carrier

25 mm (1")


BENDING / CURVING

The track can be curved and reversed curved using a 10 cm (4") radius. Additionally there is a curving possibility for special windows like arches, bows and circles. Bending instructions available on request.




SPECIAL WINDOW DECORATION

Special bends

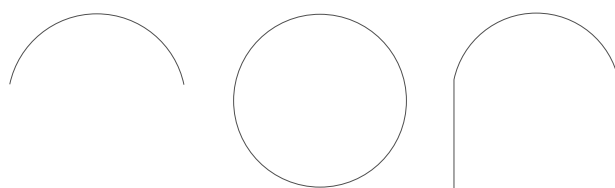

APPLICATIONS

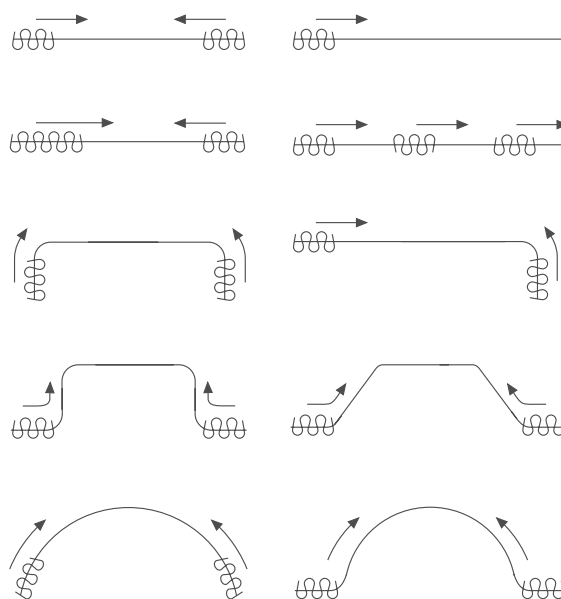

COLOUR OPTIONS KS



White



Silver



Brown




Black

MOUNTING BRACKETS

Wall bracket

3,5 cm (1,4")


6 cm (2,4")

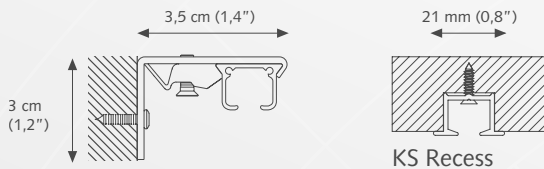

A) Min. 10 cm (4")




A) Min. 16 cm (6")

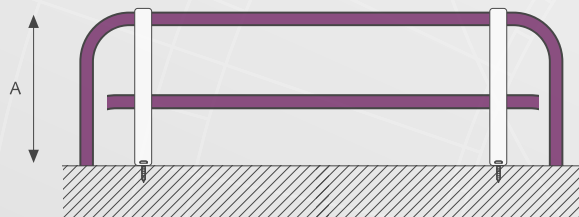

Other brackets are available. Brackets need to be placed every 60 cm (24").


Smart Click Ceiling Bracket

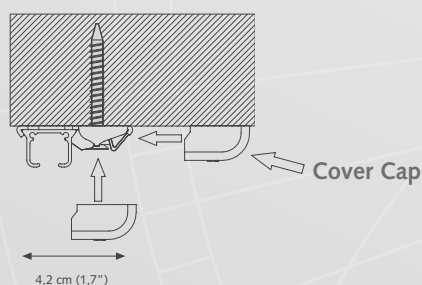

Aluminium Wall bracket single

A) 7,5 cm (3") B) 6,3 cm (2,5")


A) 10 cm (4") B) 8,8 cm (3,5")

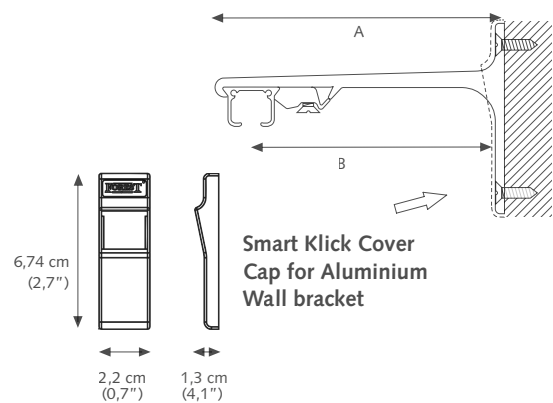

Aluminium Wall bracket double

A) 15 cm (6") B) 9,2 cm (3,6") C) 4,5 cm (1,8")

A) 20 cm (8") B) 9,2 cm (3,6") C) 9,5 cm (3,7")

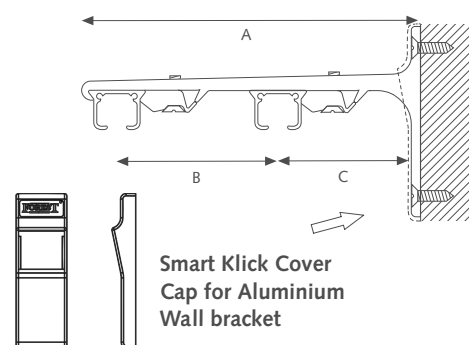

Aluminium Wall bracket triple

A) 25 cm (10") B) 9,3 cm (3,7") C) 5 cm (2")

